

A

Docket No. MIT 8312

Box Patent Application  
Assistant Commissioner of Patents  
Washington, D.C. 20231

# NEW APPLICATION TRANSMITTAL

Transmitted herewith for filing is the patent application of :

Inventor(s): Brandon W. Blackburn

For (title): LIQUID GALLIUM COOLED HIGH POWER NEUTRON SOURCE  
TARGET

## 1. Type of Application

- ☒ Utility  
☐ Design

## 2. Benefit of Prior U.S. Application(s) Under 35 U.S.C. §120

This application is a:

- ☐ Divisional  
☐ Continuation  
☐ Continuing Patent Application (CPA)  
☐ Continuation-in-part (CIP),

and hereby claims benefit under 35 U.S.C. §120 to the following applications:

SERIAL NUMBER	FILING DATE

## 3. Benefit of Non-U.S. Application Under 35 U.S.C. §119(a)-(d)

This application claims priority under 35 U.S.C. §119(a)-(d) to the following foreign application(s) and/or inventor certificate(s):

COUNTRY	APPLN. NUMBER	FILING DATE
None		

Certified copy(ies) of the application(s) and/or inventor certificate's from which priority is claimed:

- ☐ is(are) attached;  
☐ will follow.

The PTO did not receive the following listed item(s) Small Antifreeze Declaration. *Pam. W.*

EL455991986US

### CERTIFICATE OF EXPRESS MAIL UNDER 37 C.F.R. §1.10

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date July 26 1999 in an envelope as "Express Mail Post Office to Addressee" Mailing Label Number EL455991986US addressed to the: Assistant Commissioner of Patents, Washington, D.C. 20231.

*Deborah M. Costello*  
Deborah M. Costello

7/26/99

4. **Benefit of Provisional Application Under 35 U.S.C. §119(e)**

This application claims priority to the following provisional application(s):

SERIAL NUMBER	FILING DATE
60/140,709	June 24, 1999

5. **Papers Enclosed Which Are Required For Filing Date Under 37 C.F.R. §1.53**

11 Pages of Specification, including claims and abstract

2 Sheets of Drawing

6. **Additional Papers Enclosed**

- ☒ Declaration and Power of Attorney  
☐ Preliminary Amendment  
☐ Information Disclosure Statement (37 CFR 1.98), Form PTO-1449 and a copy of each cited reference  
☒ Assignment and Form PTO-1595  
☒ Small Entity Declaration  
☐ Declaration of Biological Deposit  
☐ Submission of "Sequence Listing" computer readable copy and/or amendment pertaining thereto for biotechnology invention containing nucleotide and/or amino acid sequences.  
☐ Other \_\_\_\_\_

7. **Application Filing Fee Calculation**

A. ☒ Utility Application

**FEE CALCULATION:**

Total Claims: 8 - 20 = 0 × \$18 = \$  
Independent Claims: 3 - 3 = 0 × \$78 = \$  
Basic Fee: ..... \$ 760  
Multiple-Dependent-Claim Fee : ..... \$

---

Total of the Above Calculations: ..... \$760 .00

- ☐ Amendment canceling extra claims enclosed.  
☐ Amendment deleting multiple dependencies enclosed.  
☐ Fee for extra claims is not being paid at this time.

B. ☐ Design application - \$310 \$  
Application Filing Fee Sub-Total ..... \$

C. ☐ Less 50% reduction for small entity ..... \$-380.00

D. ☐ Non-English Specification - \$130 ..... \$

**TOTAL FILING FEE ..... \$380.00**

8. **Payment**



Enclosed



Check in the amount of the Total Filing Fee set forth above.



Charge Account No. 19-0079 in the amount of Total Filing Fee set forth above. A duplicate of this transmittal is attached.



Not Enclosed

The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§1.16 and 1.17 that may be required by this paper or any paper filed in connection with this Patent Application, or refund any overpayment to our Deposit Order Account No. 19-0079.

Respectfully submitted,



Patrick J. O'Shea

Reg. No. 35,305

Samuels, Gauthier & Stevens LLP

225 Franklin Street, Suite 3300

Boston, MA. 02110

(617) 426-9180, Ext. 121

**UNITED STATES PATENT APPLICATION**

*of*

**BRANDON W. BLACKBURN**

*for*

**LIQUID GALLIUM COOLED HIGH POWER  
NEUTRON SOURCE TARGET**

# LIQUID GALLIUM COOLED HIGH POWER NEUTRON SOURCE TARGET

## 5 BACKGROUND OF THE INVENTION

The present invention relates to neutron sources, and in particular to high powered accelerator based neutron sources having liquid cooled targets.

Neutron capture therapies are two-part radiation therapies relying on the selective loading of tumor cells with a pharmaceutical containing  $^{10}\text{B}$  (or other isotopes with high neutron capture cross-sections) and subsequent tissue irradiation with thermal neutrons. Boron is nonradioactive until a thermal neutron is captured causing a  $^{10}\text{B}(\text{n},\alpha)^7\text{Li}$  fission reaction. The resulting alpha and lithium particles are high in energy (sharing 2.3 MeV), LET, and RBE, and travel less than 10 microns in tissue. These features lead to selective tumor-cell killing provided the  $^{10}\text{B}$ -containing pharmaceutical localizes well in the tumor. Other nuclides with high neutron capture cross-sections could also be used.

An external beam of thermal neutrons will be able to treat  $^{10}\text{B}$ -loaded tumors located at, or close to, the tissue surface. However, thermal neutrons are attenuated very rapidly in tissue. The need to provide a high flux of thermal neutrons at greater depths can be realized if a neutron beam with higher than thermal energy is used. The abundance of light hydrogen in tissue allows the higher energy ("epithermal") neutrons to be moderated through elastic collisions.

As the energy of the external neutron beam is increased, the thermal neutron flux at a given depth is increased. However, if the energy of the epithermal neutron beam is too high, the skin sparing due to  $1/v$  reduction in the capture cross-section of  $^1\text{H}$  and  $^{14}\text{N}$  (and any  $^{10}\text{B}$  located

in healthy tissues near the surface) will be offset by an unacceptably large surface dose created by protons recoiling from collisions with fast neutrons. A trade-off must be realized, then, between maximizing the thermal neutron flux at depth, and minimizing the dose to healthy tissue (particularly at the surface). The question of which energy (or range of energies) results in the optimum trade-off for a particular neutron capture therapy application is important in the development of epithermal neutrons.

Sources of energetic neutrons include nuclear reactors and particle accelerators in which energetic charged particles bombard one or more of a variety of target materials. A number of reactions have been investigated as potential sources of epithermal neutrons including  ${}^7\text{Li}(p,n)$  at energies between 1.88 and 3.5 MeV, and  ${}^9\text{Be}(p,n)$  at energies between 1.8 and 4.1 MeV. These reactions are endothermic and require high power accelerators to generate sufficiently intense neutron beams. An alternate approach is to make use of the exothermic  ${}^9\text{Be}(d,n)$  reaction. This reaction generates large quantities of high energy neutrons unless the deuteron bombarding energy is set below 2.0 MeV. It is then possible to design spectrum shifters (moderator/reflector assemblies) such that the final epithermal neutron beam from the  ${}^9\text{Be}(d,n)$  reaction is suitable for clinical use in the treatment of deep-seated tumors (Boron Neutron Capture Therapy) or rheumatoid arthritis (Boron Neutron Capture Synovectomy). Details of neutron capture therapies are disclosed in co-pending U.S. application serial number 08/919,870, entitled "Neutron Capture Therapies", which is hereby incorporated by reference.

In accelerator-based systems must be housed in a moderator/reflector assembly that is used to tailor the neutron energy to the specific treatment. The moderator/reflector assembly is

typically cylindrical in cross section and contains liquid  $D_2O$  moderator in a lead or graphite reflector. In order to limit the diameter of the final neutron beam targets are limited in size. Depending on charged beam particle size, power densities of 2-20 MW/m<sup>2</sup> may be encountered in targets having areas of 10-15 cm<sup>2</sup>.

Conventional targets have been water cooled. For example, see U.S. Patent 5,392,319.

However, water cooled targets require high flow velocities and high flow rates in order to provide sufficient target cooling. An additional problem with water cooled targets is that high heat fluences at the target run the risk of exceeding the critical heat flux (CHF). Once the CHF is exceeded, the heat transfer significantly decreases and catastrophic system failure can follow.

Therefore, there is a need for an improved cooling system for neutron source particle targets.

## SUMMARY OF THE INVENTION

Briefly, according to the present invention, a neutron source includes a low atomic number element target that is bombarded by incident energetic particles to provide a neutron flux. The source receives a controlled flow of liquid gallium that cools the target.

The energetic particles may be for example protons or deuterons and the target is housed in a moderator/reflector assembly.

Advantageously, the liquid gallium provides improved heat transfer, smaller flow rates and reduced stress on the target in comparison to prior art liquid coolants.

These and other objects, features and advantages of the present invention will become more

apparent in light of the following detailed description of preferred embodiments thereof, as illustrated in the accompanying drawings.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a functional block diagram illustration of a liquid gallium cooled high power neutron source; and

FIG. 2 is a cross sectional illustration of a portion of the accelerator based neutron source.

## DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 is a functional block diagram illustration of a liquid gallium cooled high power neutron source system 10. The system 10 comprises an accelerator based neutron source 12 that includes a low Z target (not shown). As known, the target emits neutrons in response to being bombarded by energetic particles, which may be for example protons or deuterons.

The system 10 includes a liquid gallium reservoir 14 that is connected to a pump 16 through a check valve 18. The system may also include a flow meter 20 and a pressure sensor 22 to monitor the flow of liquid gallium into the accelerator based neutron source 12 which is used to remove heat from the target. The liquid gallium flows from the accelerator based neutron source 12 through a heat exchanger 24 and back to the reservoir 14. A second pressure sensor 26 is also used for monitoring by a controller (not shown). A check valve 28 is disposed in the flow line between the reservoir 14 and the heat exchanger 24. The pump 16 provides a controlled



flow of liquid gallium to cool the target (not shown) within the accelerator based neutron source 12.

FIG. 2 is a cross sectional illustration of a portion 30 of the accelerator based neutron source 12. The source 12 includes a stainless steel housing 31 within which is a beryllium target 32 having a first surface 33 that is bombarded by energetic particles, which may be for example protons or deuterons. In response, the beryllium target 32 produces a neutron flux and in the process becomes very hot. According to the present invention, liquid gallium is used to cool the target 32.

The source 12 includes a nozzle 34 that receives the liquid gallium and provides a concentrated flow 37 of liquid gallium onto a second surface 39 of the target 32. The second surface 39 is on the opposite side of the first surface 33. The liquid gallium fills chamber 40 and exits to the heat exchanger 24 (FIG. 1).

Significantly, employing liquid gallium as the working fluid in a heat removal system for the neutron producing beryllium target allows the system to operate under conditions that would be beyond the critical heat flux of water with similar flow rates. Liquid gallium possesses thermo-physical properties that make it ideal for applications with heat fluences as high as 20 MW/m<sup>2</sup>. Initial tests using water coolant illustrated that heat fluences of 15 MW/m<sup>2</sup> could be removed from a 0.254 cm thick beryllium target with high velocities in a submerged jet impingement configuration. These tests found that heat removal was due to forced convective boiling and required jet velocities of 24 m/s and flow rates of 87 GPM which were provided by a 15 hp centrifugal pump. Because the target relied on boiling for the heat transfer, critical heat flux

(CHF) was a major concern at high heat fluences. During tests with water, in fact, CHF failure of the target was witnessed. As an alternative to using water at large flow rates and velocities, a working fluid was sought which could be used at similar heat fluences at a greatly reduced flow rate.

5        Liquid gallium can be pumped near room temperature and because of its low kinematic viscosity, Reynold's numbers (Re) are generated which are over a factor of two higher than those of water at similar flow velocities. Because it is a liquid metal, gallium possesses a thermal conduction coefficient which is over fifty (50) times higher than water.

10        Experiments to illustrate the effectiveness of gallium cooling were conducted using a 4.1 MeV tandem accelerator to heat a 0.254 cm thick beryllium target that was cooled with water or liquid gallium. Temperatures were measured at various target locations and at power loadings of 0-500 Watts with coolant flow rates of 1 L/min and coolant temperatures of 50 °C. Because it was difficult to determine the size of the beam striking the target, several separate tests were run using first water and then gallium as the cooling fluid. Temperature measurements versus power  
15        loadings were made at similar optical settings to ensure beam sizes and associated heat fluences were similar. Temperature measurements were then used with the numeric code Adina to estimate the average heat transfer coefficient and beam size. Results of the temperature measurements indicate that for equal flow rates, gallium lowers the temperature interface between the fluid and the target by as much as 30%. At a flow rate of 1 L/min gallium was able to remove 490 Watts  
20        with an interface temperature increase of 25 °C compared to a 40 °C increase with water. Even at low flow rates gallium generates a convective heat coefficient of up to  $6.0e^4$  W/m<sup>2</sup>K. Unlike

water which boils at 100 °C, heat transfer from gallium would be linear up to the melting point of the target at 1200 °C. CHF begins to be a problem with water cooling when the target surface temperature is higher than the saturation temperature by about 30 °C. This is not the case with gallium, however, since it has a low vapor pressure and does not boil below 2200 °C.

5           Significantly, gallium removes large heat fluences with low flow rates without the danger of exceeding the CHF. Because it is a liquid near room temperature, it does not require excessive heating or insulation. Unlike other liquid metal coolants like sodium or lithium it is not reactive with moisture, and it presents no toxicity concerns like mercury or lead bismuth eutectics.

10           Although the present invention has been discussed in the context of a beryllium target, one of ordinary skill will recognize that the present invention is certainly not limited to beryllium targets. It is contemplated that any neutron producing target (e.g., lithium) will enjoy the improved performance of the liquid gallium coolant. In addition, it is contemplated that the present invention has a broad application to accelerators and even lasers.

15           Although the present invention has been shown and described with respect to several preferred embodiments thereof, various changes, omissions and additions to the form and detail thereof, may be made therein, without departing from the spirit and scope of the invention.

What is claimed is:

## CLAIMS

- 1 1. A method of cooling a low Z target material of a neutron source assembly, comprising the  
2 step of:  
3 circulating liquid gallium past the target material to cool the low Z target material.
- 1 2. The method of claim 1, wherein said step of circulating comprises the steps of:  
2 providing a reservoir of liquid gallium; and  
3 pumping the liquid gallium from the reservoir to the low Z target material to cool the target  
4 material and through a heat exchanger to remove heat from the liquid gallium.
- 1 3. The method of claim 1, wherein said step of circulating comprises the step of providing  
2 a flow of liquid gallium through a nozzle that establishes a jet of liquid gallium that impinges upon  
3 the target.
- 1 4. The method of claim 2, wherein the target material comprises beryllium.
- 1 5. A neutron source assembly having a liquid cooled target, comprising:  
2 a modulator/reflector assembly that includes a low Z target material that is bombarded by  
3 accelerated particles to produce a neutron flux; and  
4 a cooling system that circulates liquid gallium through said modulator/reflector assembly

5 to cool the low Z target material.

1 6. The neutron source assembly of claim 5, wherein said cooling system comprises:  
2 a reservoir of liquid gallium;  
3 a heat exchanger in fluid connection with said reservoir of liquid gallium; and  
4 means for circulating said liquid gallium between said reservoir of liquid gallium, said heat  
5 exchanger and said modulator/reflector assembly.

1 7. The neutron source assembly of claim 6, wherein said means for circulating comprises a  
2 pump.

3 8. A liquid cooling system for a neutron source assembly, said cooling system comprising:  
4 a reservoir of liquid gallium;  
5 a heat exchanger in fluid connection with said reservoir of liquid gallium; and  
6 means for circulating said liquid gallium between said reservoir of liquid gallium, said heat  
exchanger and the neutron source assembly to remove heat from a neutron generating target  
material within the neutron source assembly.

## ABSTRACT

A neutron source includes a low atomic number element target that is bombarded by incident energetic particles to provide a neutron flux. The source receives a controlled flow of liquid gallium that cools the target. The energetic particles may be for example protons or deuterons and the target is housed in a moderator/reflector assembly. Advantageously, the liquid gallium provides improved heat transfer, smaller flow rates and reduced stress on the target in comparison to prior art liquid coolants.

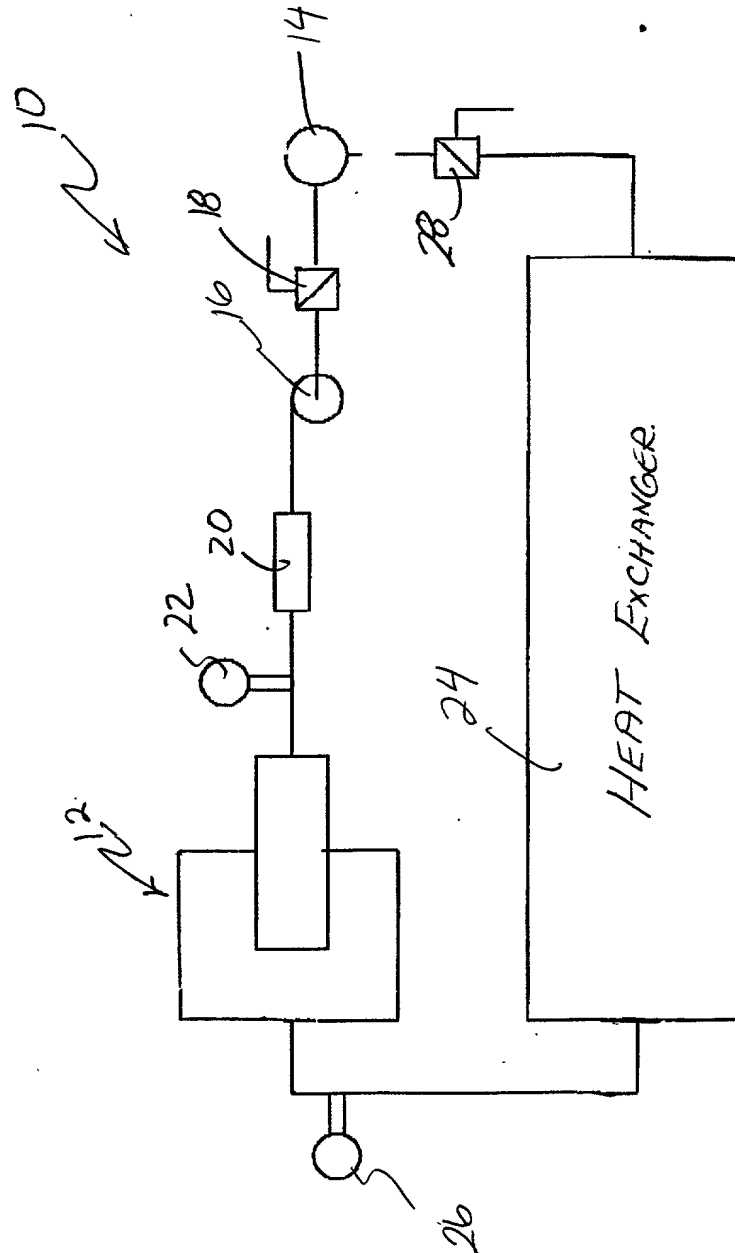


FIG. 1

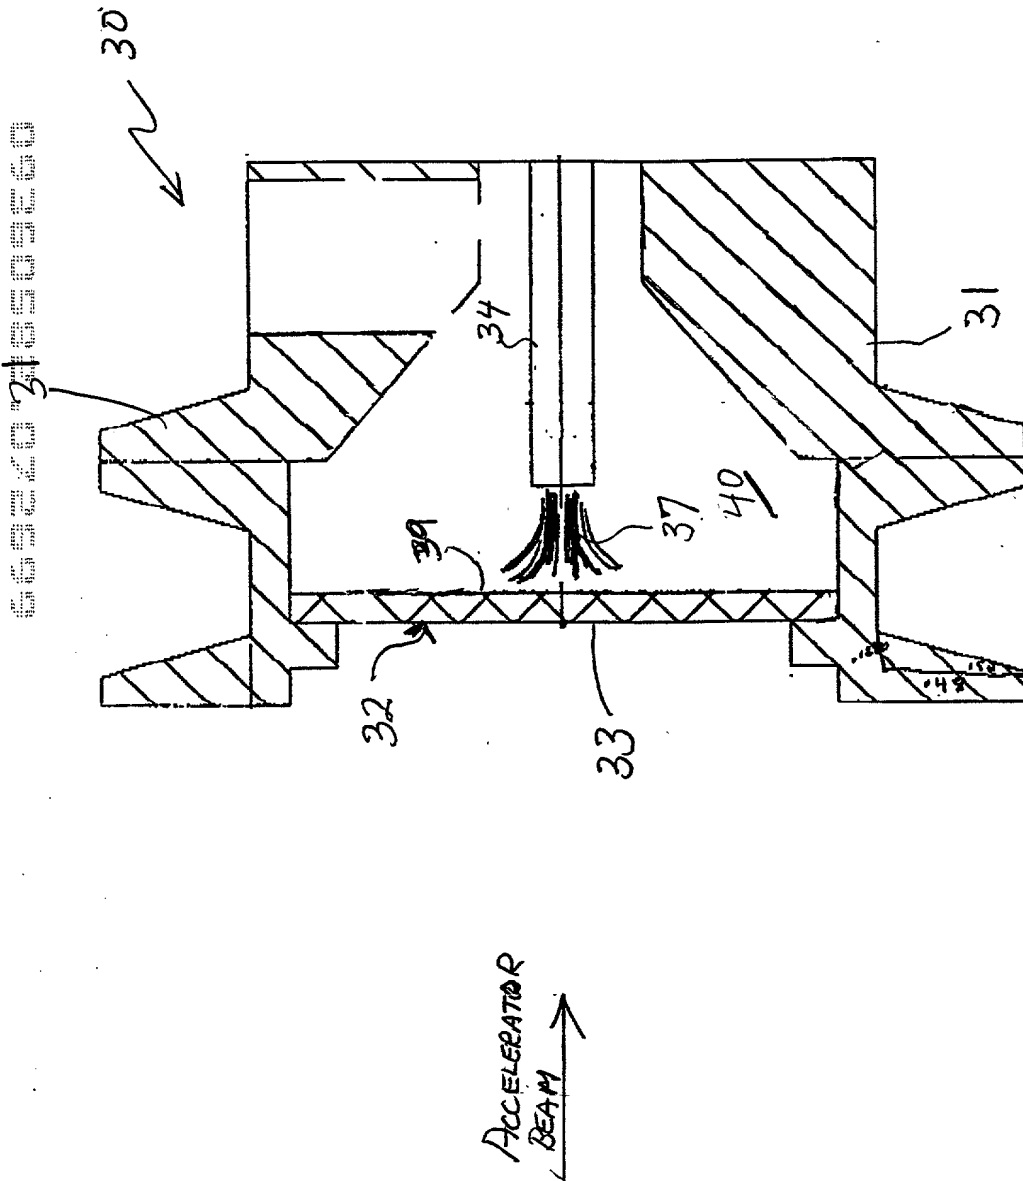


FIG. 2



**DECLARATION AND POWER OF ATTORNEY**

I, the below named inventor, hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first, and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled LIQUID GALLIUM COOLED HIGH POWER NEUTRON SOURCE TARGET, the specification of which is attached hereto. This application claims priority under 35 U.S.C. §119(e) from United States Provisional Patent Application Serial No. 60/140,709, filed June 24, 1999.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims.

I acknowledge the duty to disclose information which is material to patentability in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby declare that all statements made herein based on my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

And I hereby appoint:

Maurice E. Gauthier	- Reg. No. 20,798
I. Stephen Samuels	- Reg. No. 20,919
Richard L. Stevens	- Reg. No. 24,445
Matthew E. Connors	- Reg. No. 33,298
Arlene J. Powers	- Reg. No. 35,985
William E. Hilton	- Reg. No. 35,192
Patrick J. O'Shea	- Reg. No. 35,305

all of the firm of Samuels, Gauthier & Stevens, our attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

I request that all correspondence be directed to:

Patrick J. O'Shea, Esq.  
Samuels, Gauthier & Stevens, LLP  
225 Franklin Street, Suite 3300  
Boston, MA 02110

BRANDON W. BLACKBURN  
Brandon W. Blackburn

Brandon W. Blackburn  
(Inventor's Signature)

7-23-99

(Date)

U. S.

(Citizenship)

236 Winthrop Shore Drive  
Winthrop, MA 02152

(Residence)

Same as Residence

(Post Office Address)